

# DIRECT OPERATED SOLENOID VALVE


## DASH 1 SERIES

### D1X350

#### VALVE CHARACTERISTICS:

VALVE FUNCTION:	3 WAY
ORIFICE:	.062 in (1.6mm) Cv=.04
PRESSURE RANGE:	5-20 Psig.
VOLTAGE:	24 Vdc
POWER:	0.6 Watts
CONNECTOR TYPE:	IN-LINE
VALVE PORTS AND MOUNTING:	PORTS IN BODY/SCREW MOUNT
SEALS:	NBR (BUNA N)
TEMPERATURE RANGE:	0° To 122°F (-18° To 50°C)
MEDIA:	Air and inert gases.
FILTRATION	40 micron
LUBRICATION	Not Required
OTHER	L.E.D., manual override.

#### VALVE SYMBOLS:

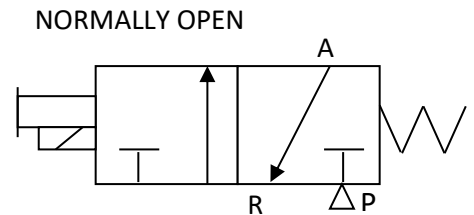

#### DRAWING:

