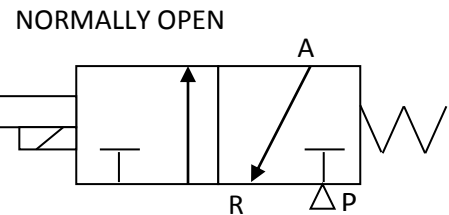


DIRECT OPERATED SOLENOID VALVE**SPECIAL D1X SERIES****D1X531-2****VALVE CHARACTERISTICS:**

VALVE FUNCTION:	3 WAY
ORIFICE:	.089 in (2.3 mm) Cv=.08
PRESSURE RANGE:	25-87 psig
VOLTAGE:	24 Vdc
POWER:	2.5 Watts
CONNECTOR TYPE:	DIN 43650 (EN 175301-803)
VALVE PORTS AND MOUNTING:	PORTS IN BODY/SCREW MOUNT
SEALS:	NBR (BUNA N)
TEMPERATURE RANGE:	0° To 122°F (-18° To 50°C)
MEDIA:	Air and inert gases.
FILTRATION	40 micron
LUBRICATION	Not Required
OTHER	L.E.D., manual override.

VALVE SYMBOLS:**DRAWING:****SEE DRAWING 3401-1**