


# DIRECT OPERATED SOLENOID VALVE

## D1X554

### VALVE CHARACTERISTICS:

VALVE FUNCTION:	3 WAY
ORIFICE:	.062 in (1.6mm) Cv=.04
PRESSURE RANGE:	0-105 psig
VOLTAGE:	24 VDC
POWER:	2.5 Watts
CONNECTOR TYPE:	PC BOARD MOUNT SPECIAL
VALVE PORTS AND MOUNTING:	PORTS IN BODY
SEALS:	NBR (BUNA N)
TEMPERATURE RANGE:	0° To 150°F (-18° To 65°C)
MEDIA:	Air and inert gases.
FILTRATION	40 micron
LUBRICATION	Not Required

### VALVE SYMBOLS:

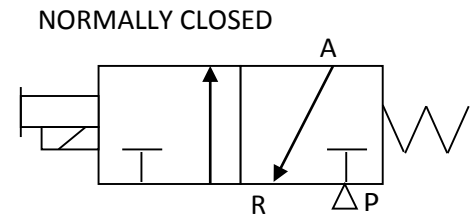

### DRAWING:

